

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problems Mailbox.**

THIS PAGE BLANK (USPTO)

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 922 465 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
16.06.1999 Bulletin 1999/24

(51) Int Cl.⁶: **A61M 16/04**

(21) Application number: **98308846.9**

(22) Date of filing: **28.10.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **Smiths Industries Public Limited
Company**
London, NW11 8DS (GB)

(72) Inventor: **Pagan, Eric**
Hythe, Kent CT21 6DN (GB)

(30) Priority: **02.12.1997 GB 9725389**


(74) Representative: **Flint, Jonathan McNeill et al**
765 Finchley Road
London NW11 8DS (GB)

(54) Laryngeal mask assemblies

(57) A laryngeal mask assembly has an inflatable cuff 13 mounted at the patient end 14 of a tube 1. The cuff 13 has a region 15 on its anterior surface 16 and a region 18 on its posterior surface 17 that expand preferentially when gas pressure is increased. The cuff 13 is inflated for insertion at low pressure such that the cuff

takes one shape and is then further inflated when positioned correctly such that the region 15 on the anterior surface 16 expands and engages the epiglottis 5 and such that the region 18 on the posterior surface 17 expands and engages the adjacent tissue, pushing the anterior surface 16 forwardly.

Fig.2.

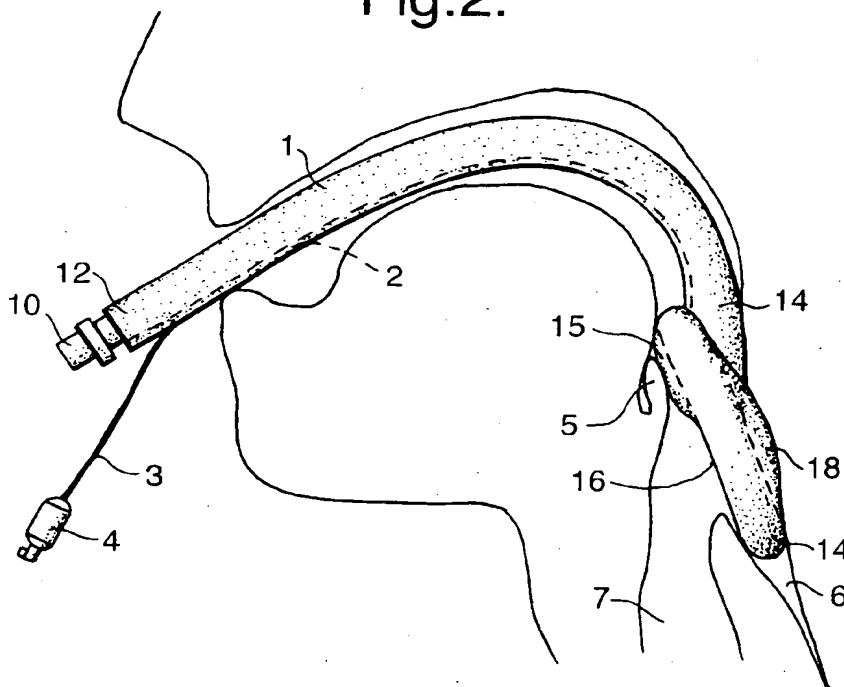

EP 0 922 465 A2

Description

[0001] This invention relates to laryngeal mask assemblies of the kind comprising a tube with a mask portion at its patient end, the tube having an opening into the centre of the anterior face of the mask portion.

[0002] It is common practice to use an airway known as a laryngeal mask for administering anaesthetic and ventilation gases to a patient. These airways comprise a tube with an inflatable mask or cuff at one end, the tube being inserted in the patient's mouth so that one end is located in the hypopharynx and so that the mask forms a seal in this region with the surrounding tissue. Laryngeal masks are described in, for example, US 5355879, US 5305743, US 5297547, US 5282464, GB 2267034, US 5249571, US 5241956, US 5303697, GB 2249959, GB 2111394, EP 448878, US 4995388, GB 2205499, GB 2128561, GB 2298797 and GB 2323290.

[0003] Laryngeal masks have several advantages over endotracheal tubes, which are longer and seal with the trachea below the vocal folds. One problem with laryngeal mask airways, however, is that it is difficult to provide the cuff, which is of relatively complex shape, at low cost.

[0004] It is an object of the present invention to provide an improved laryngeal mask assembly.

[0005] According to one aspect of the present invention there is provided a laryngeal mask assembly of the above-specified kind, characterised in that the mask portion includes an inflatable cuff arranged to take a first shape when filled with gas at low pressure and to take a second shape different from the first shape when the pressure of gas in the cuff is increased.

[0006] The second shape may include an enlarged portion on the anterior face of the cuff arranged to engage the epiglottis. The second shape may include an enlarged portion on the posterior face of the cuff arranged to engage adjacent tissue and push the anterior face of the cuff anteriorly. The cuff is preferably made by blow moulding. The cuff may have a reduced wall thickness in a region of the cuff, such that the region expands preferentially when gas pressure is increased. A region of the cuff may be treated to be weaker such that the region expands preferentially when gas pressure is increased. The cuff may have a region that is strengthened such that other regions expand preferentially when gas pressure is increased. The region that is strengthened may be strengthened by incorporating strengthening matter different from the cuff material. The region that is strengthened may be strengthened by increasing the thickness of the cuff material.

[0007] A laryngeal mask airway assembly according to the present invention, will now be described, by way of example, with reference to the accompanying drawings, in which:

Figure 1 is a side elevation view of the assembly with the cuff partially inflated;

Figure 2 is a side elevation view of the assembly with the cuff fully inflated;

Figure 3 is a perspective view of the posterior face of the patient end of the assembly with the cuff fully inflated; and

Figure 4 is an end view of the anterior face of the patient end of the assembly with the cuff fully inflated.

[0008] The assembly comprises a bendable tube 1 of a plastics material, such as PVC, with a coupling 10 at its machine end 12. The tube 1 is curved along its length and has a mask portion with a cuff 13 attached at the patient end 14 of the tube.

[0009] The tube 1 is extruded with a small bore lumen 2 within its wall. The lumen 2 is connected towards the machine end of the assembly to an air line 3, which is terminated with a connector 4. The opposite, patient end of the lumen 2 opens into the cuff 13.

[0010] The cuff 13 is a ring or annulus of oval or elliptical shape, with a hollow centre 23 through which the tube 1 opens at the patient end of the assembly. The cuff 13 is of a plastics material such as PVC or polyurethane and is shaped so that it forms an effective seal with the pharynx or hypopharynx. The cuff 13 is made such that, when it is inflated to low pressure, with just sufficient air to fill the internal volume of the cuff, it takes a first shape, which is selected to be the best shape for introducing the cuff to the correct anatomical position. When additional air is supplied to the cuff 13, it changes to a second, different shape, which is the best shape for forming a seal in the pharynx and hypopharynx and for ensuring that the epiglottis 5 does not obstruct the opening 23 to the tube 1. This second, different shape is not simply an inflated, larger volume version of the first shape, and it is not simply a shape dictated by the limiting effect of the surrounding tissue, since the cuff 13 behaves in the same way when inflated outside the body, without the restrictions of the surrounding anatomy.

[0011] The first shape, used for insertion and positioning of the cuff 13 is relatively flat, enabling the forward end 14 of the cuff 13 to be located at the top of the oesophagus 6 with the tube opening 23 on its anterior face 16 facing into the top of the trachea 7. When inflated to its second shape, the cuff 13 expands preferentially in a region 15 at the upper, machine end of its forward, anterior face 16, so as to displace the epiglottis 5 anteriorly away from the opening to the tube. The cuff 13 also expands along its rear, posterior surface 17 in a central region 18 to bear against the posterior surface of the hypopharynx and thereby urge the forward surface 16 of the cuff into close sealing engagement with the adjacent tissue around the opening of the trachea 7.

[0012] The cuff 13 is preferably made by a blow-moulding process to the first shape. There are several

ways in which the cuff 13 can be arranged to expand preferentially in the selected regions 15 and 18, which involve either making these regions more easily deformed by internal pressure, or by making the other regions less easily deformed. One way is to give the regions 15 and 18 that are to be deformed a reduced wall thickness or to treat these regions to make the material of the wall intrinsically weaker or a combination of both. The reduced wall thickness could be achieved by inflating the cuff before it is fully cured within a mould having a cavity of the second shape, whilst ensuring that the cuff is not stretched beyond its elastic limit in the regions 15 and 18. An alternative way is to strengthen the other regions such as by incorporating strengthening matter different from the cuff material, such as webs or filaments. The regions could be strengthened instead by coating to increase its strength or thickness, or by a combination of additional strengthening and increased thickness.

[0013] In use, the cuff 13 is partly inflated to its first shape outside the body and is inserted to the correct location, in the usual way. When correctly located, an additional measured volume of air is pumped into the cuff 13 via the connector 4 to displace the epiglottis 5 and to push the anterior face 16 of the cuff into effective sealing engagement with the tissue surrounding the opening of the trachea 7.

Claims

1. A laryngeal mask assembly comprising a tube (1) with a mask portion at its patient end (14), the tube (1) having an opening (23) into the centre of an anterior face (16) of the mask portion, characterised in that the mask portion includes an inflatable cuff (13) arranged to take a first shape when filled with gas at low pressure and to take a second shape different from the first shape when the pressure of gas in the cuff (13) is increased.
2. A laryngeal mask assembly according to Claim 1, characterised in that the second shape includes an enlarged portion (15) on the anterior face (16) of the cuff (13) arranged to engage the epiglottis (5).
3. A laryngeal mask according to Claim 1 or 2, characterised in that the second shape includes an enlarged portion (18) on the posterior face (17) of the cuff (13) arranged to engage adjacent tissue and push the anterior face (16) of the cuff (13) anteriorly.
4. A laryngeal mask assembly according to any one of the preceding claims, characterised in that the cuff (13) is made by blow moulding.
5. A laryngeal mask assembly according to any one of the preceding claims, characterised in that the cuff (13) has a reduced wall thickness in a region (15, 18) of the cuff, such that the region (5, 18) expands preferentially when cuff pressure is increased.
6. A laryngeal mask assembly according to any one of the preceding claims, characterised in that a region (15, 18) of the cuff (13) is treated to be weaker such that the region (15, 18) expands preferentially when gas pressure is increased.
7. A laryngeal mask assembly according to any one of the preceding claims, characterised in that the cuff (13) has a region that is strengthened such that other regions expand preferentially when gas pressure is increased.
8. A laryngeal mask assembly according to Claim 7, characterised in that the region that is strengthened is strengthened by incorporating strengthening matter different from the cuff material.
9. A laryngeal mask assembly according to Claim 7 or 8, characterised in that the region that is strengthened is strengthened by increasing the thickness of the cuff material.

Fig.1.

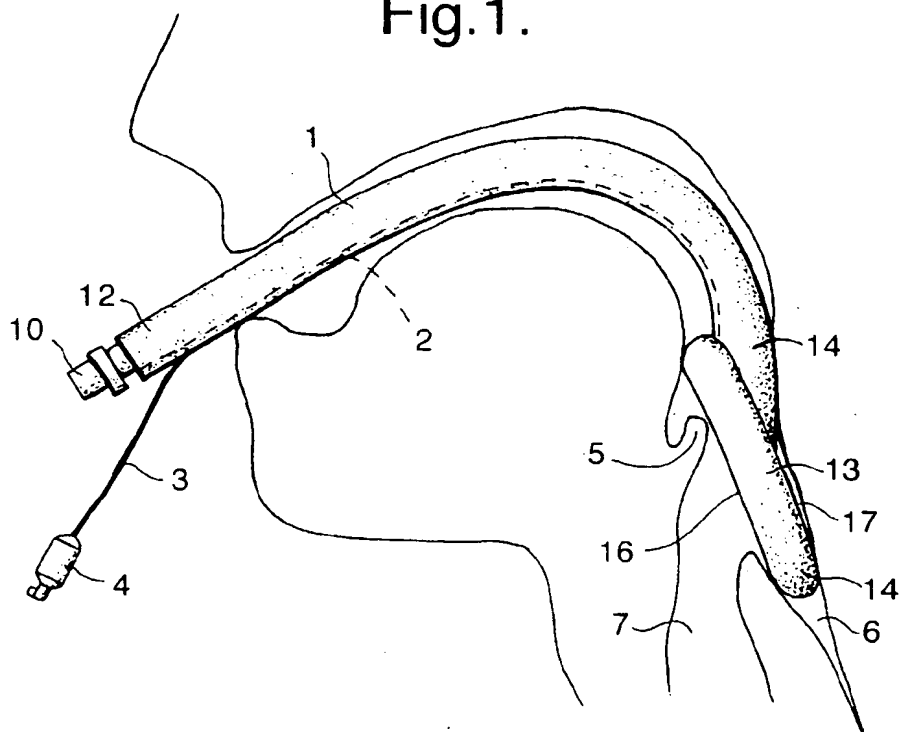


Fig.2.

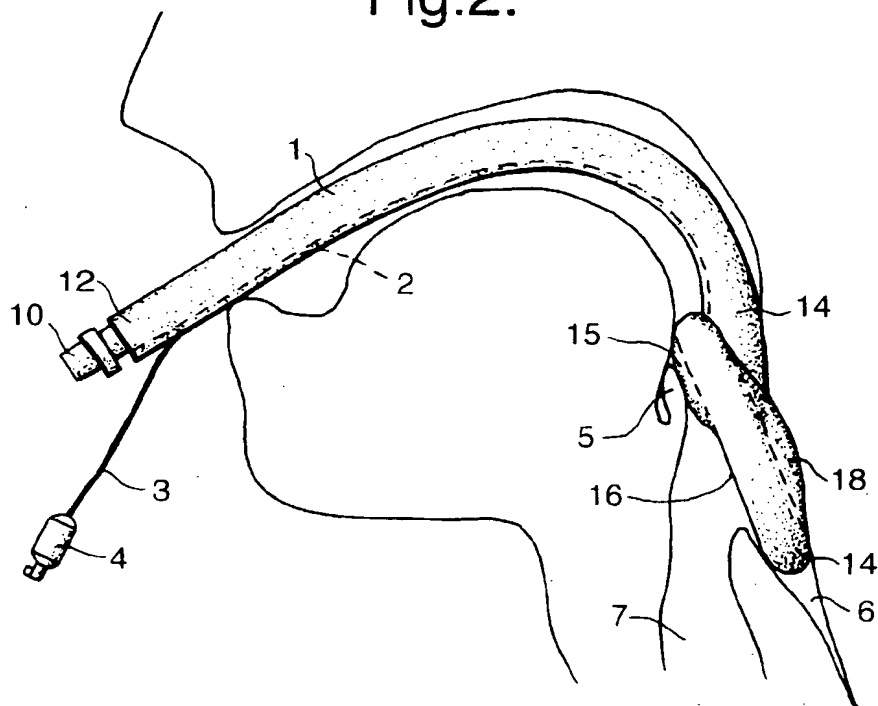


Fig.3.



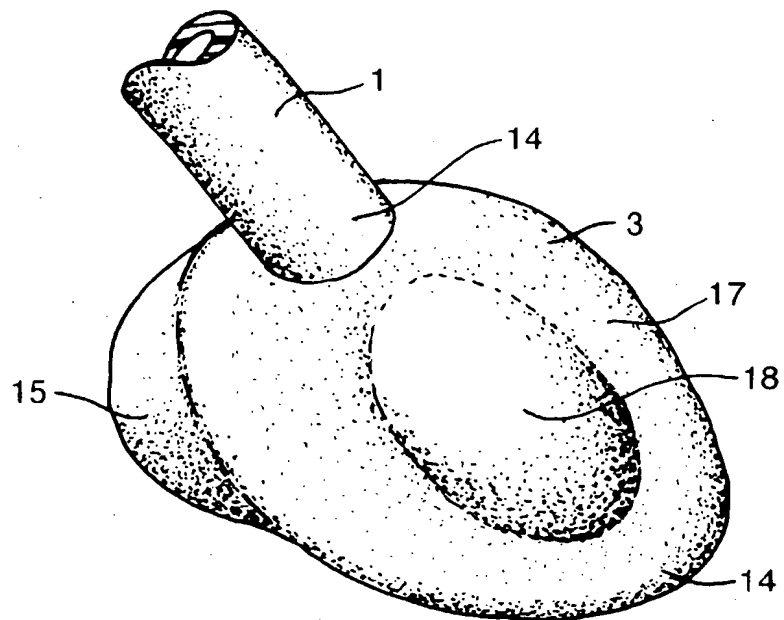


Fig.4.



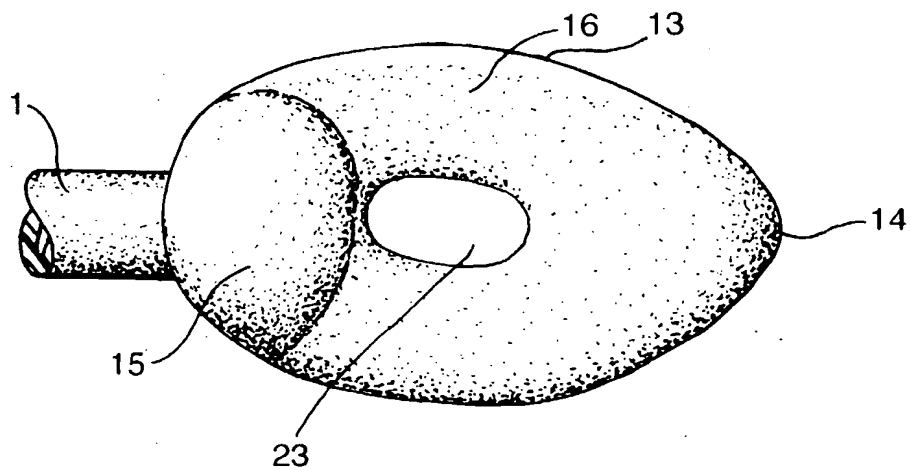

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 922 465 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
29.12.1999 Bulletin 1999/52

(51) Int Cl.⁶: **A61M 16/04**

(43) Date of publication A2:
16.06.1999 Bulletin 1999/24

(21) Application number: **98308846.9**

(22) Date of filing: **28.10.1998**

(84) Designated Contracting States:
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE**
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **Smiths Industries Public Limited
Company**
London, NW11 8DS (GB)

(72) Inventor: **Pagan, Eric**
Hythe, Kent CT21 6DN (GB)

(30) Priority: **02.12.1997 GB 9725389**


(74) Representative: **Flint, Jonathan McNeill et al**
765 Finchley Road
London NW11 8DS (GB)

(54) Laryngeal mask assemblies

(57) A laryngeal mask assembly has an inflatable cuff 13 mounted at the patient end 14 of a tube 1. The cuff 13 has a region 15 on its anterior surface 16 and a region 18 on its posterior surface 17 that expand preferentially when gas pressure is increased. The cuff 13 is inflated for insertion at low pressure such that the cuff

takes one shape and is then further inflated when positioned correctly such that the region 15 on the anterior surface 16 expands and engages the epiglottis 5 and such that the region 18 on the posterior surface 17 expands and engages the adjacent tissue, pushing the anterior surface 16 forwardly.

Fig.2.

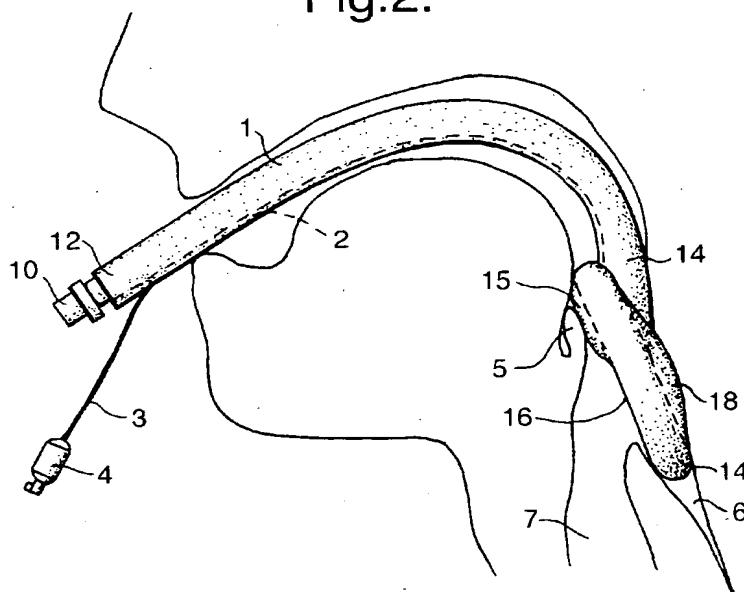

EP 0 922 465 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 98 30 8846

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
D,A	US 5 241 956 A (BRAIN ARCHIBALD I J) 7 September 1993 (1993-09-07) * column 9, line 8 - column 10, line 16; figures 10-12 *	1-3,5,6	A61M16/04
A	US 3 810 474 A (CROSS D) 14 May 1974 (1974-05-14) * column 2, line 38 - line 66; figures 1-4 * * column 3, line 14 - line 37 * * column 3, line 48 - line 57 * * column 4, line 23 - line 28 *	1,4	
A	FR 2 146 470 A (EUROMEDICAL IND LTD) 2 March 1973 (1973-03-02) * page 2, line 3 - line 18; figures *	1,7,9	
A	DE 11 70 586 B (DR. MED. HEINZ MELZER) 21 May 1964 (1964-05-21) * column 3, line 25 - line 56; figures 1-3,7 * * column 7, line 46 - line 58 *	1,8	
A	US 4 340 046 A (COX EVERARD F) 20 July 1982 (1982-07-20) * column 1, line 53 - line 62; figure 3 * * column 2, line 3 - line 5 * * column 2, line 17 - line 22 * * column 5, line 59 - column 6, line 13 *	1	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			A61M
Place of search		Date of completion of the search	Examiner
THE HAGUE		8 November 1999	Zeinstra, H
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 30 8846

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-11-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5241956 A	07-09-1993	AT 151650 T	15-05-1997
		AU 666756 B	22-02-1996
		AU 4580393 A	14-02-1994
		BR 9306757 A	08-12-1998
		CA 2100998 A,C	24-01-1994
		CA 2107027 A,C	29-03-1994
		DE 69309930 D	22-05-1997
		DE 69309930 T	23-10-1997
		DK 651664 T	20-10-1997
		EP 0651664 A	10-05-1995
		ES 2103481 T	16-09-1997
		WO 9402191 A	03-02-1994
		GR 3023983 T	31-10-1997
		JP 2918338 B	12-07-1999
		JP 7509154 T	12-10-1995
		NZ 254213 A	27-02-1996
		US 5355879 A	18-10-1994
		ZA 9305289 A	22-04-1994
US 3810474 A	14-05-1974	GB 1402255 A	06-08-1975
		CA 1000150 A	23-11-1976
		DE 2246526 A	29-03-1973
		DK 135564 B	23-05-1977
		FI 58591 B	28-11-1980
		FR 2153452 A	04-05-1973
		NL 7212771 A	27-03-1973
FR 2146470 A	02-03-1973	SE 399644 B	27-02-1978
		BE 786599 A	16-11-1972
		DE 2236010 A	01-02-1973
		GB 1327858 A	22-08-1973
		IT 962990 B	31-12-1973
NL 7210009 A	24-01-1973		
DE 1170586 B		NONE	
US 4340046 A	20-07-1982	US 4471776 A	18-09-1984

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)